




FlexFusion® Team ELECTRIC COMBI GEN2

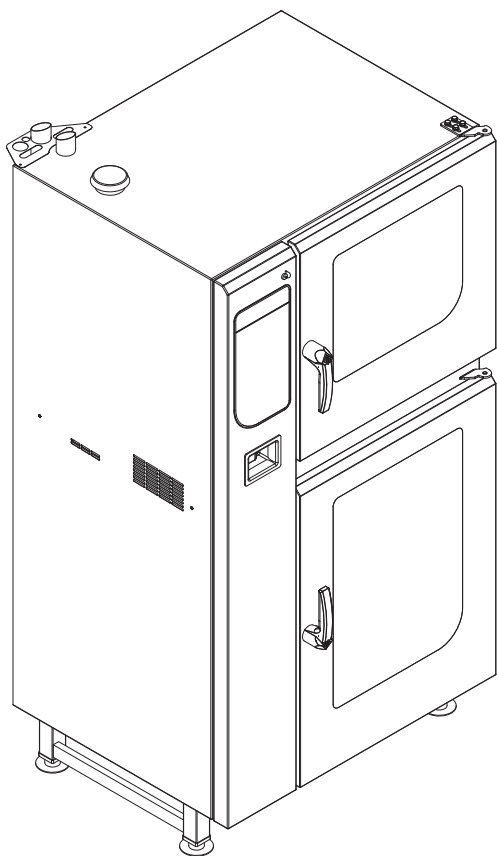

FM09-239A

Exploded drawings

Model

FPDE615-615
FPDE615-621
FPDE621-615
FPDE621-621
FPDE115-615
FPDE115-621
FPDE121-615
FPDE121-621

en-US



Henny Penny Corporation
P.O.Box 60
Eaton, OH 45320
USA

Phone +1 937 456-8400
Fax +1 937 456-8402

Toll free in USA
Phone +1 937 417-8417
Fax +1 937 417-8434

www.hennypenny.com

Introduction	5
1.1 About this manual	5
1.2 Warranty	5
Operation panel A2	6
WLAN module	7
Front panel	8
Core temperature sensor	9
Cooking chamber door	10
Housing	13
Supply air assembly	16
Energy module	17
Additional circuit board A3	20
Hose reel box with electrical parts	21
Water assembly with WaveClean	23
DynaSteam humidification	25
Drainage area of the cooking chamber	26
Wires and cable harnesses	27

Introduction

1.1 About this manual

This service manual contains information needed by the service technician for professional and correct fault isolation, repair and maintenance of the unit. The service technician must also observe the contents of the installation instructions and the user manual.

Target group Target group for this service manual is qualified personnel who are familiar with the technical functioning and operation of the unit and have been trained to work on electrical units.

Figures All figures in this service manual are intended as examples. Discrepancies can arise between this and the actual unit.

Spare parts To ensure the reliability of the unit and the individual components, it is essential that only genuine OEM parts be used. Spare parts can be identified exactly with the aid of the online database.

1.2 Warranty


The warranty is void and safety is no longer assured in the event of:

- Modifications or technical changes to the unit,
- Improper use,
- Incorrect startup, operation or maintenance of the unit,
- Problems resulting from failure to observe these instructions.


Operation panel A2

Position	Art. Nr. Part no.	Deutsch	English	FF Team Series 1	FF Team Series 2
1	10036188	Bedienpanel FlexFusion Team Generation 2	Operation panel FlexFusion Team Generation 2	x	x
2	209337	Klebeschild HennyPenny "Series 1" für Türgriff	Label HennyPenny "Series 1" for door handle	x	
2	209338	Klebeschild HennyPenny "Series 2" für Türgriff	Label HennyPenny "Series 2" for door handle		x
3	10031786	OEM-Label "HennyPenny" FF Team	OEM-Label "HennyPenny" FF Team	x	x
4	10037777	Schild FlexFusion Team (G2)	Inlay FlexFusion Team (G2)	x	x


WLAN module

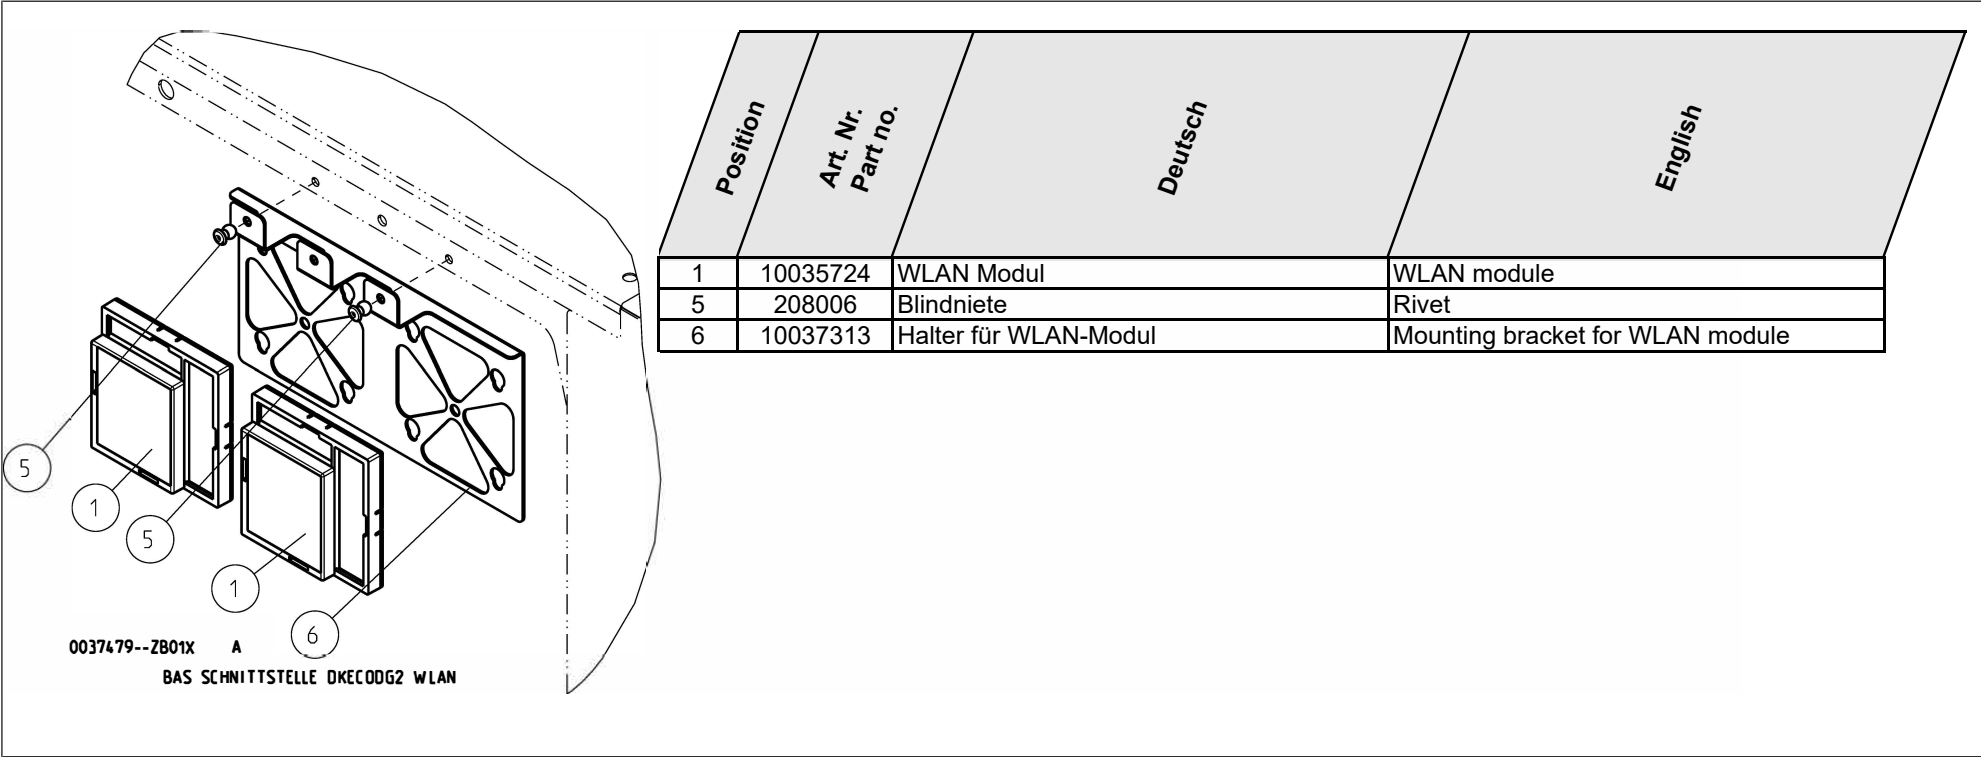

Front panel

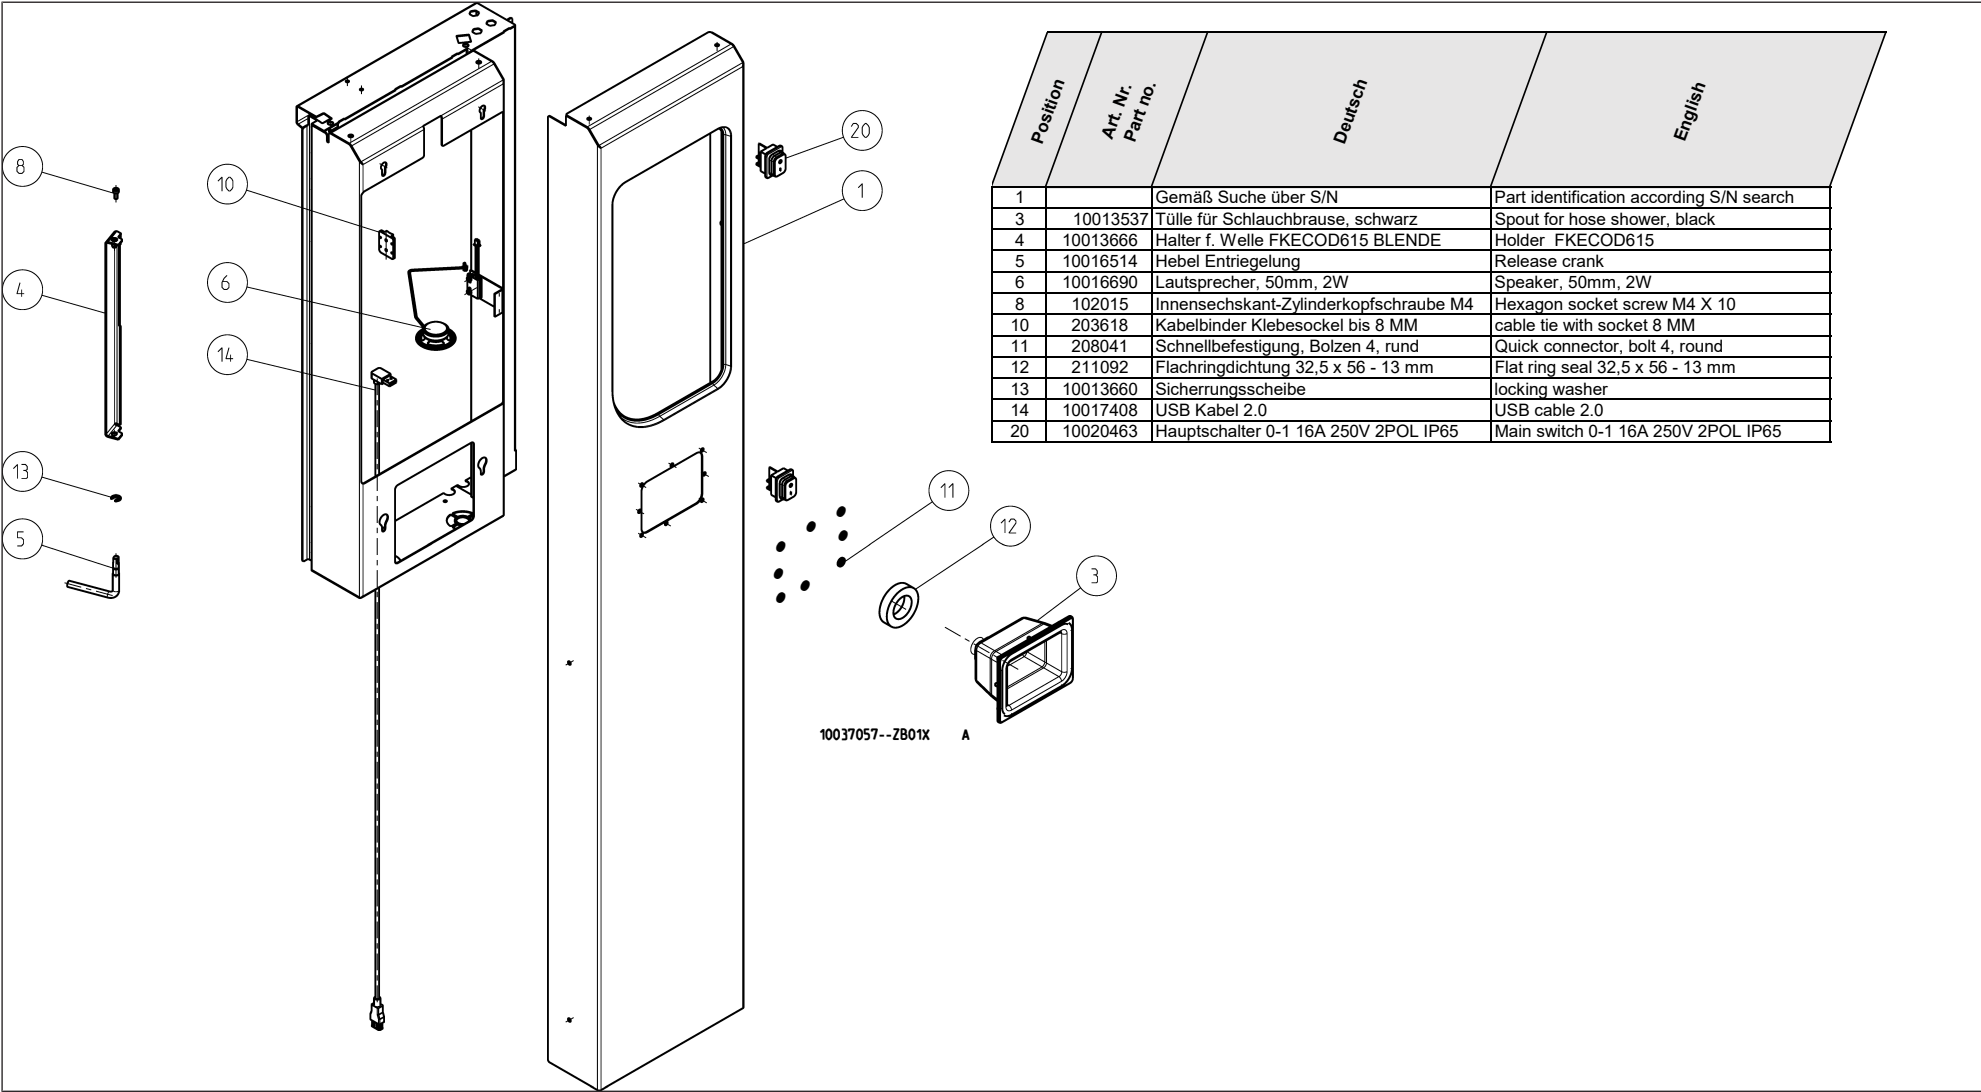


Core temperature sensor

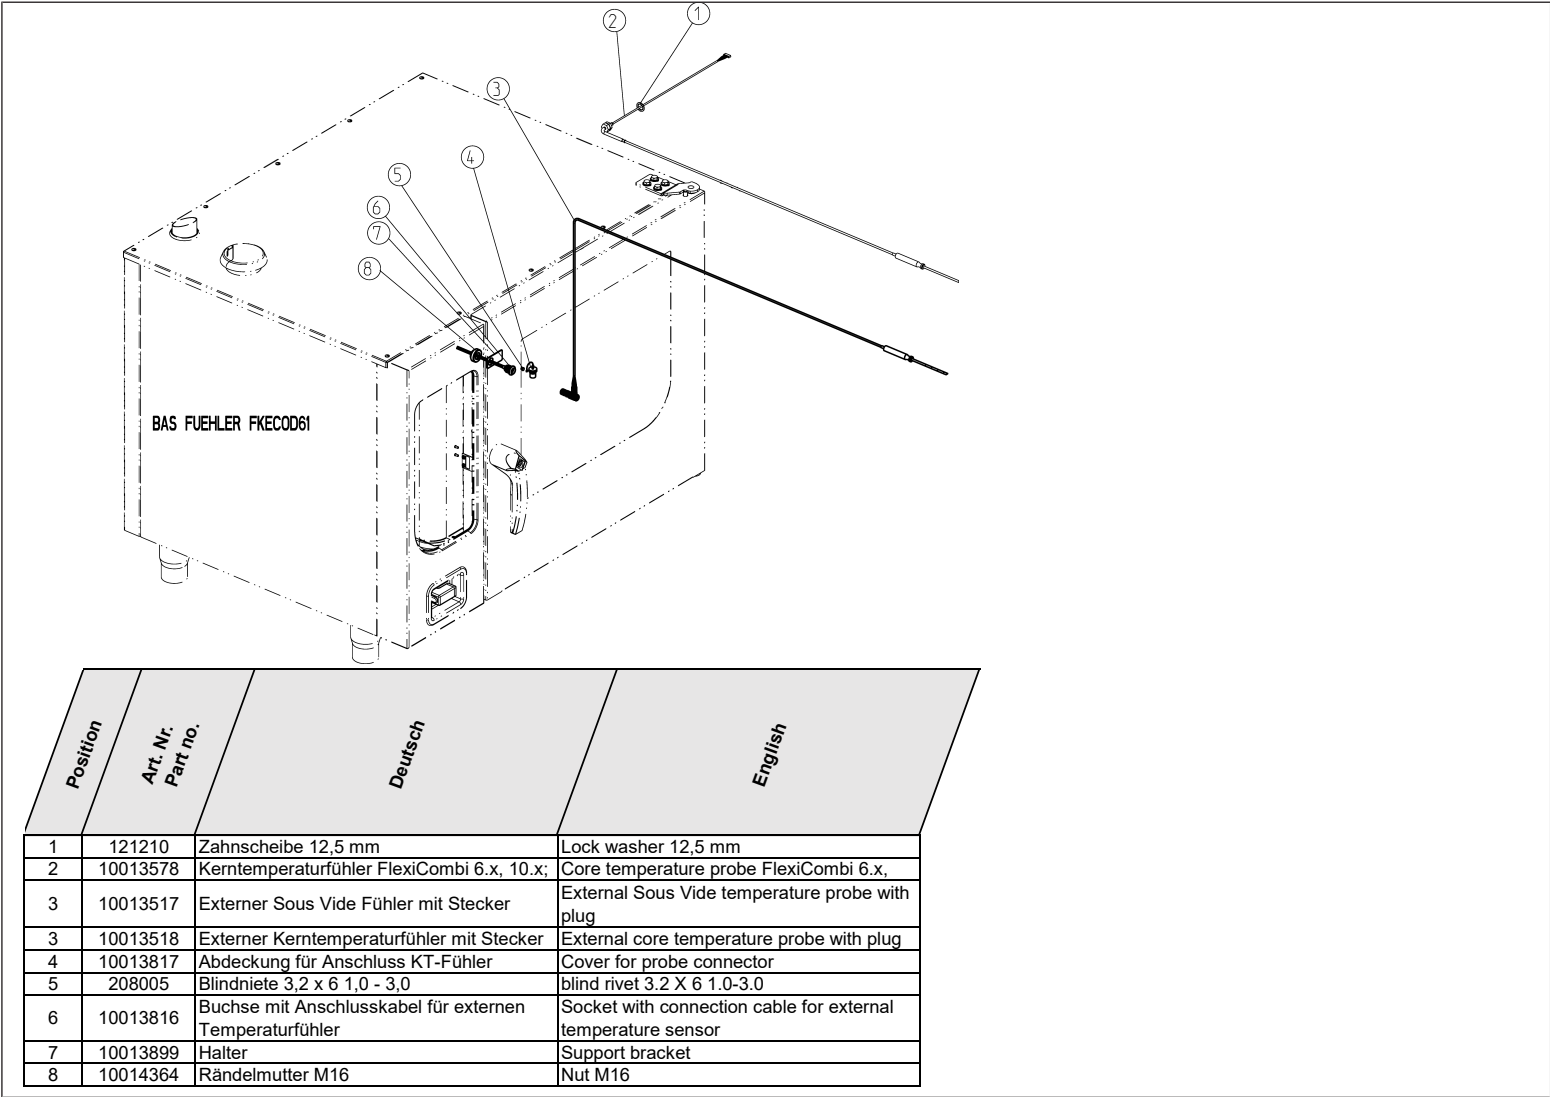

FM09-239A

Cooking chamber door

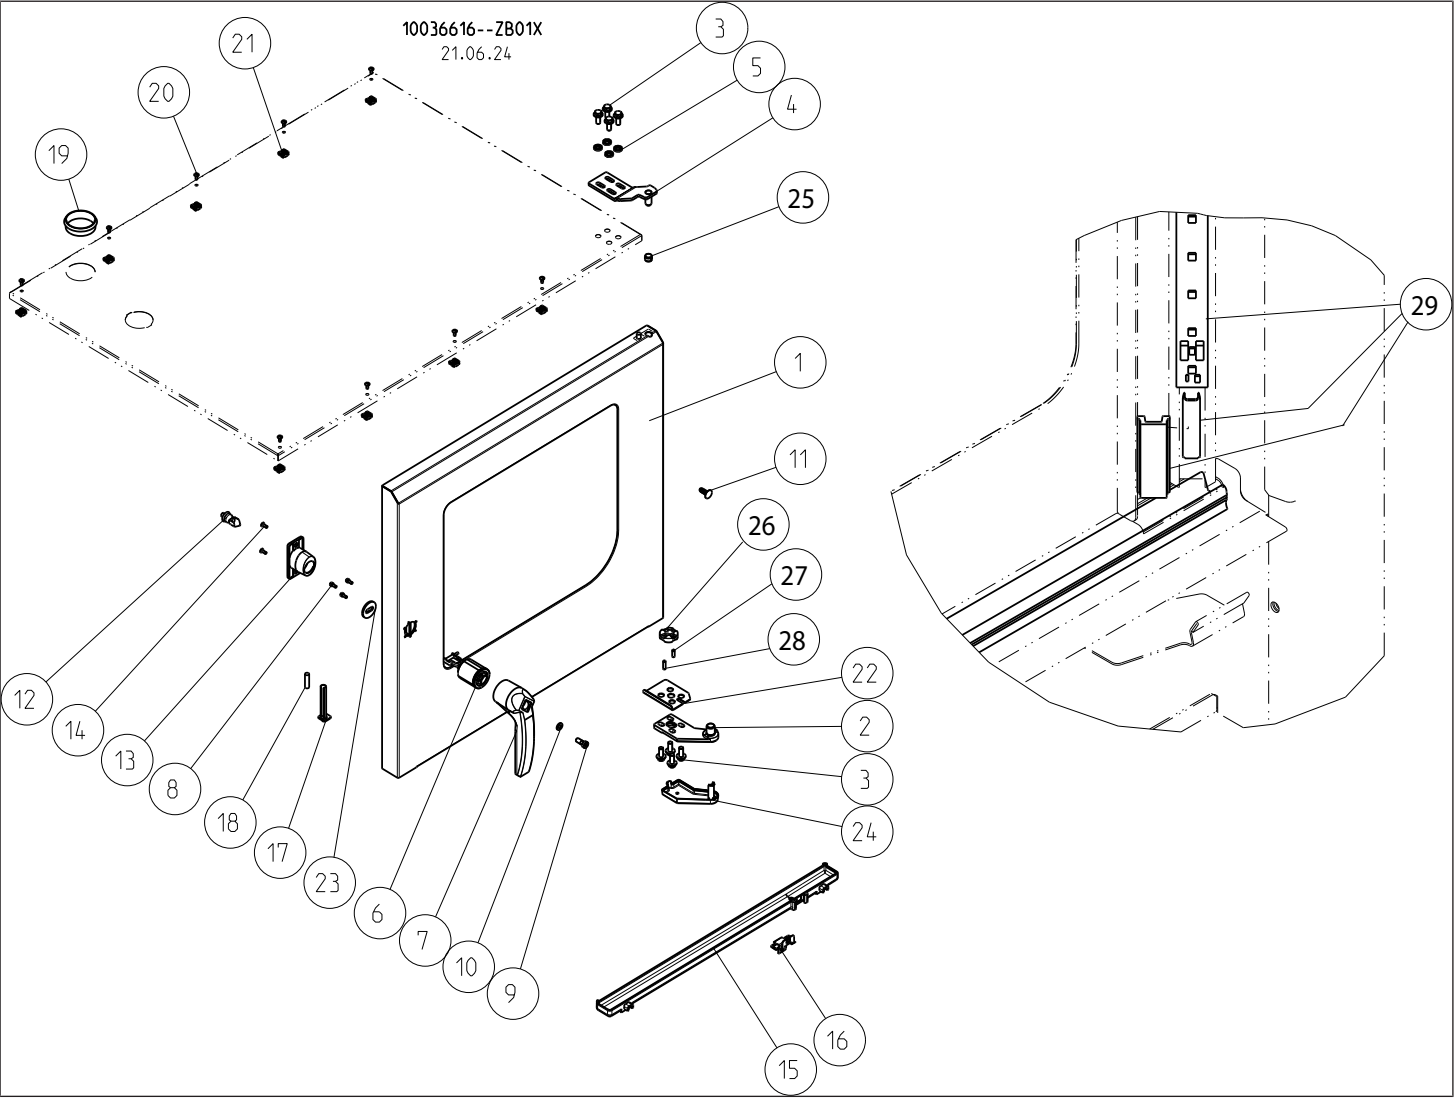


Position	Art. Nr. Part no.	Deutsch	English	615, 621 Rechts / right (10036616)	115, 121 Rechts / right (10036624)	615, 621 Links / left (10036618)	115, 121 Links / left (10036626)
1	10028564	Garraumtür 6.x Rechtsanschlag, FlexiCombi G2 – ohne Türverschluss	Chamber door 6.x right hinged, FlexiCombi G2- without door lock	x			
1	10028372	Garraumtür 10.x Rechtsanschlag, FlexiCombi G2 – ohne Türverschluss	Chamber door 10.x right hinged, FlexiCombi G2- without door lock		x		
1	10030330	Garraumtür 6.x Linksanschlag, FlexiCombi G2 – ohne Türverschluss	Chamber door 6.x left hinged, FlexiCombi G2- without door lock			x	
1	10028734	Garraumtür 10.x Linksanschlag, FlexiCombi G2 – ohne Türverschluss	Chamber door 10.x left hinged, FlexiCombi G2- without door lock				x
2	10029665	Türscharnier 6.x, 10.x unten	Door hinge 6.x, 10.x bottom	x	x	x	x
3	10012857	Sechskantschraube M8 x 20 mit Flansch	hexagon screw M8 x 20 bolt hinge	x	x	x	x
4	960461	Türscharnier 6.x, 10.x, rechts oben	Door hinge 6.x, 10.x, top right	x	x		
4	10013530	Türscharnier 6.x, 10.x links oben	Door hinge 6.x, 10.x top left			x	x
5	10016478	Sicherungsscheibe M8	Locking washer M8	x	x	x	x
6	10012036	Türverschuß Kombidämpfer 6.x, 10.x	Door latch Combisteamer 6.x, 10.x	x	x	x	x
7	10013388	Türgriff Kombidämpfer, schwarz	Door handle Combisteamer, black	x	x	x	x
8	102015	Innensechskant-Zylinderkopfschraube M4	Hexagon socket screw M4 X 10	x	x	x	x
9	102050	Innensechskant-Zylinderkopfschraube M8 x	Hexagon socket screw M8 x 20	x	x	x	x
10	121034	Federring, 8 mm	Lock washer, 8 mm	x	x	x	x
11	211111	Abdeckkappe 7 mm Durchmesser	Cover cap 7 mm diameter	x	x	x	x
12	207090	Verschlusskloben; 1 Raste	Door catch; 1 notch	x	x	x	x
12	207091	Verschlusskloben; 2 Rasten (Option)	Door catch; 2 notches (option)	x	x	x	x
13	10013389	Abdeckkappe Türverschuß 6.x, 10.x	Cover cap door lock Combisteamer 6.x,	x	x	x	x
14	105466	Flachkopfschraube M4 x 12 mm	Countersunk screw M4 x 12 mm	x	x	x	x
15	10019250	Tür-Auffangwanne für Garraumtür; komplett, schwarz	Collecting tray for cabinet door; complete, black	x	x	x	x
16	10037570	Verschlussbügel für Tür-Auffangwanne #10019250	Bracket for door tray #10019250	x	x	x	x
17	10036873	Halter für Türmagnet	Holder for door magnet	x	x	x	x
18	203032	Magnet; 32 mm lang; Durchmesser 8,2 mm	Magnet; 32 mm long; 8,2 mm diameter	x	x	x	x
19	211079	Ringdichtung für Rohr DN 50	Ring seal for DN 50 pipe	x	x	x	x
20	118005	Flachkopfschraube M4 x 10	Countersunk screw M4 x 10	x	x	x	x
21	208025	Schnappmutter M4	Snap nut M4	x	x	x	x
22	10035053	Verstärkungsblech	Reinforcement plate	x	x	x	x
23	10015536	Flachdichtung für Türverschluss	Flat seal for door lock	x	x	x	x
24	10038441	Abdeckkappe für unteres Türscharnier #10029665	Cover for bottom door hinge #10029665	x	x	x	x
25	204057	Buchse 14 X 12 - 10 mm	Jack 14 X 12 - 10 mm	x	x	x	x

Cooking chamber door

<i>Position</i>	<i>Art. Nr. Part no.</i>	<i>Deutsch</i>	<i>English</i>	<i>615, 621 Rechts / right (10036616)</i>	<i>115, 121 Rechts / right (10036624)</i>	<i>615, 621 Links / left (10036618)</i>	<i>115, 121 Links / left (10036626)</i>
26	10028369	Türrastscheibe; unten	Door snap washer; bottom	x	x	x	x
27	123005	Spannstift 5 x 16	Dowel pin 5 x 16	x	x	x	x
28	123034	Zylinderstift 5 x 20	Straight pin 5 x 20	x	x	x	x
29	10038362	LED Servicekit für 615, 621 Garraumtür	LED service kit LED for 615, 621 cabinet door	x		x	
29	10038363	LED Servicekit für 115, 121 Garraumtür	LED service kit LED for 115, 121 cabinet door		x		x

Housing

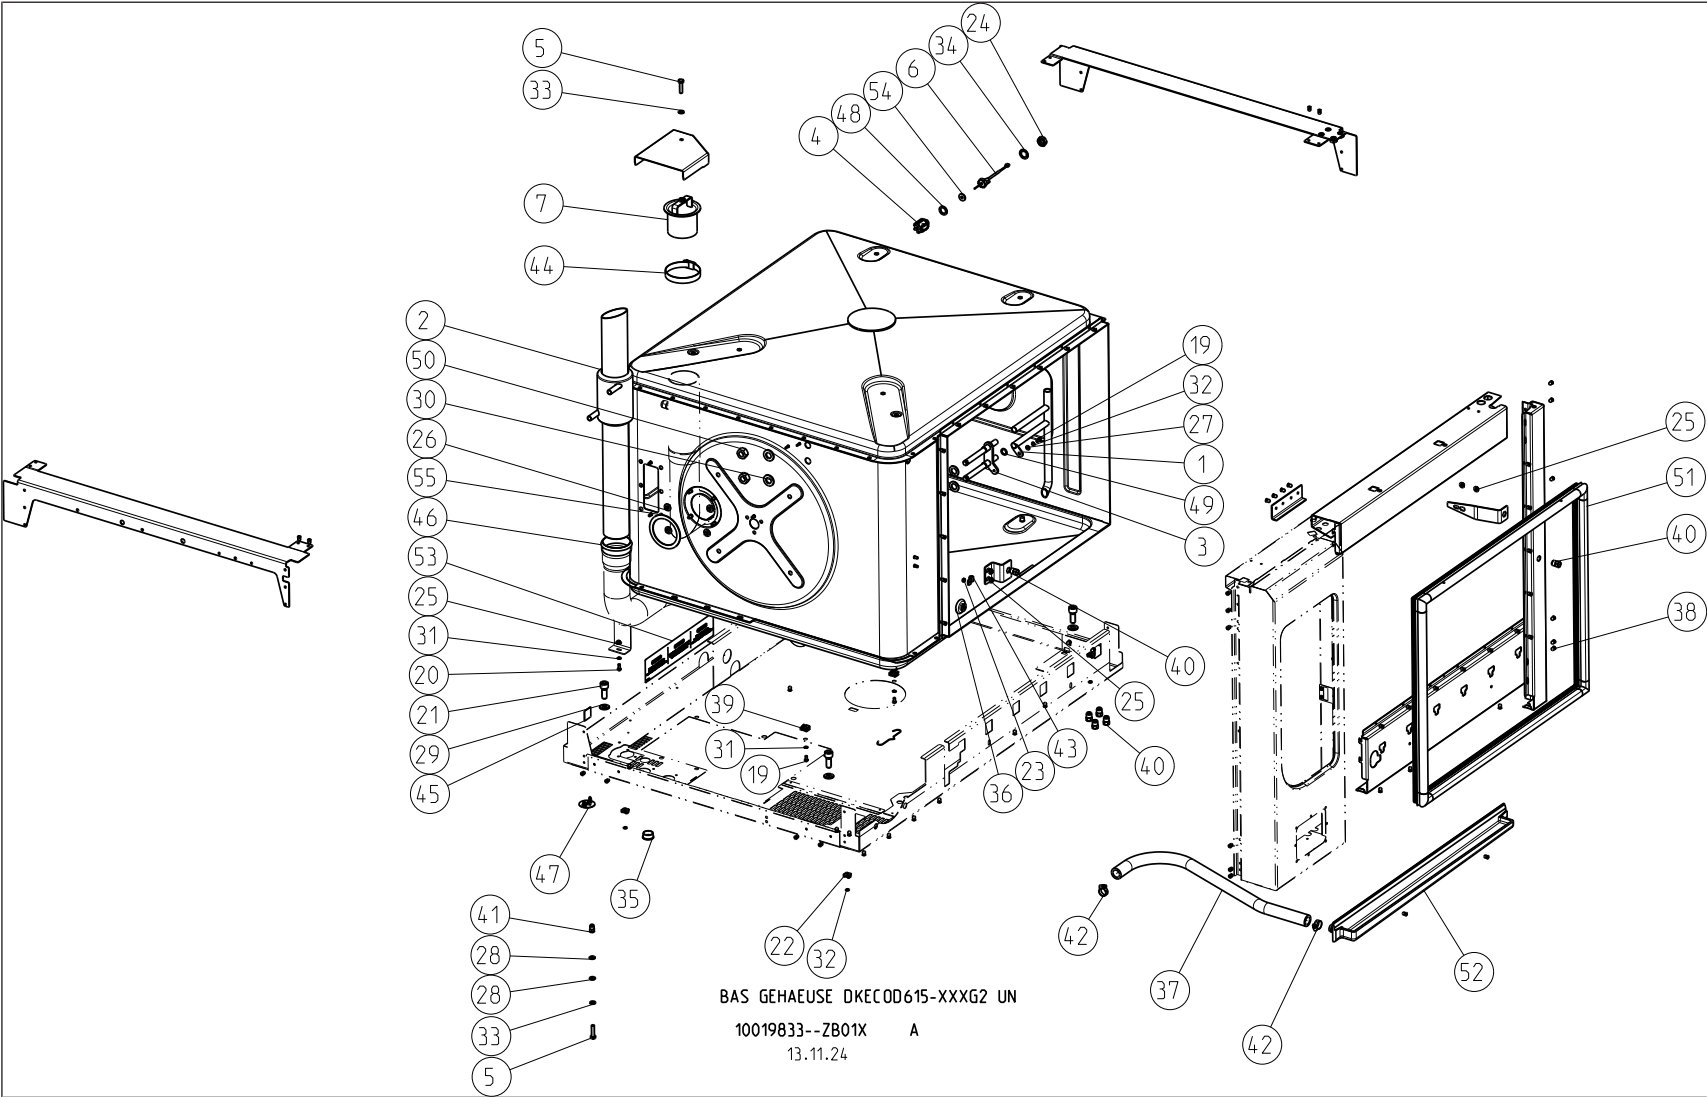

FM09-239A

Position	Art. Nr. Part no.	Deutsch	English	615, 621 electric (10038516)	115, 121 electric (10038519)
1	204430	Wasserzulaufrohr FKE 6.x - 20.x	Water supply pipe FKE 6.x - 20.x	x	x
2	10010176	Abluftrohr 6.x mit Wärmetauscher	Exhaust pipe 6.x with heat exchanger	x	
2	10010177	Abluftrohr 10.x mit Wärmetauscher	Exhaust pipe 10.x with heat exchanger		x
3	10011101	Rohrleitung für Wasserzulaufrohr	Piping for water supply pipe	x	x
4	10022864	Schutzkorb für Garraumfühler	Protection basket for chamber probe	x	x
5	101411	Sechskantschraube M6 x 25	Hexagon screw M6 x 25	x	x
6	10031251	Temperaturfühler, 245 cm lang mit Stecker	Temperature probe, 245 cm length with	x	x
7	10039415	Mittleres Belüfterteil incl. Dichtung	Center ventilation part incl. Gasket	x	x
19	101127	Sechskantschraube M4 x 8	Hexagon screw M4 x 8	x	x
20	101412	Sechskantschraube M4 x 10	Hexagon screw M4 x 10	x	x
21	102075	Innensechskant-Zylinderkopfschraube M3 x	Hexagon socket screw M3 x 10	x	x
22	113014	Käfigmutter M4	Cage nut M4	x	x
23	113082	Sechskantmutter M4	Hexagon nut M4	x	x
24	113097	Sechskantmutter M12; flach	Hexagon nut M12; flat	x	x
25	116044	Sicherungsmutter M4	Lock nut M4	x	x
26	116046	Sicherungsmutter M5	Lock nut M5	x	x
27	120017	Unterlegscheibe 4,3 mm	Washer 4,3 mm	x	x
28	120027	Unterlegscheibe 6,4 mm	Washer 6,4 mm	x	x
29	120037	Unterlegscheibe 10,5 mm	Washer 10,5 mm	x	x
30	120045	Unterlegscheibe 13 mm	Washer 13 mm	x	x
31	121023	Fächerscheibe 4,3 mm	Serrated washer 4,3 mm	x	x
32	121031	Federring, 4 mm	Lock washer, 4 mm	x	x
33	121033	Federring, 6 mm	Lock washer, 6 mm	x	x
34	121210	Zahnscheibe 12,5 mm	Lock washer 12,5 mm	x	x
35	203452	Zentriertülle für 20,4 mm Durchmesser	Centre nozzle for 20,4 mm diameter	x	x
36	204396	Kabelhalter	holder for cable	x	x
37	204690	Schlauchleitung Rinne - Siphon	Hose for collecting tray -siphon	x	x
38	208006	Blindniete	Rivet	x	x
39	208025	Schnappmutter M4	Snap nut M4	x	x
40	208039	Einziehmutter M8	Retractable nut, M8	x	x
41	208042	Mutter Blindniet M6 0.5-3	Nut screw blind rivets M6 0.5-3	x	x
42	208049	Schlauchschelle 12 - 20 mm	Hose clip 12 - 20 mm	x	x
43	208057	Spannschelle 6 mm	Clamp 6 mm (for probe)	x	x
44	208065	Schlauchschelle 50 - 70 mm	Hose clip 50 - 70 mm	x	x
45	209090	Klebeschild Potentialausgleich	Label potential equalization	x	x
46	211079	Ringdichtung für Rohr DN 50	Ring seal for DN 50 pipe	x	x
47	211140	Schnapp-Abdeckkappe 22 - 25,5 mm	Cap 22 - 25,5 mm	x	x
48	214009	Flachringdichtung 12 x 19 - 1 mm	Flat ring seal 12 x 19 - 1 mm	x	x


<i>Position</i>	<i>Art. Nr. Part no.</i>	<i>Deutsch</i>	<i>English</i>	<i>615, 621 electric (10036516)</i>	<i>115, 121 electric (10036519)</i>
49	10011097	Flachringdichtung 10 x 14 - 1 mm	Flat ring seal 10 x 14 - 1 mm	x	x
50	10011099	Sechskantmutter M12 x 1	Hexagon nut M12 x 1	x	x
51	10012489	Türdichtung Kombidämpfer 6.x, Typ 2012	Door gasket Combisteamer 6.x, type 2012	x	
51	10012490	Türdichtung Kombidämpfer 10.x, Typ 2012	Door gasket Combisteamer 10.x, type 2012		x
52	10013386	Auffangwanne (Gehäuse) 6.x / 10.x	Collecting tray (chassis) 6.x / 10.x	x	x
53	10016581	Warnaufkleber	warning sticker	x	x
54	10019583	Flachringdichtung 5.2X15-1.6	Flat ring seal 5.2X15-1.6	x	x
55	10039414	Flachringdichtung 59.5 x 75 - 1.5 mm	Flat ring seal 59.5 x 75 - 1.5 mm	x	x

Supply air assembly

MBG ZULUFT FKCD0115 24V
10029091--ZB01X C
08.08.24

Position	Art. Nr. Part no.	Deutsch	English	615, 621 (10038572)	115, 121, 215, 221 (10029091)	615, 621 Team unten / bottom (10021006)	115, 121 Team unten / bottom (10021006)
1	10022051	Hubmagnet; 24V DC	lift magnet; 24V DC	x	x	x	x
2	10028373	Zuluftanschluss	Fresh air pipe	x	x		
3	10039531	Zuluftschlauch 15,5 cm lang	Fresh air hose 15,5 cm length	x			
3	10039532	Zuluftschlauch 29,5 cm lang	Fresh air hose 29,5 cm length		x		
3	10039411	Zuluftschlauch 18,5 cm lang	Fresh air hose 18,5 cm length			x	
3	10039412	Zuluftschlauch 32,5 cm lang	Fresh air hose 32,5 cm length				x
4	105002	Zylinderkopfschraube geschlitz M3 x 4	Hexagon socket screw M3 x 4	x	x	x	x
5	201170	Abdeckung Zuluftrohr	Adapter for fresh air pipe	x	x		
6	203727	Kabelverschraubung PG 7	Cable screw fitting PG 7	x	x	x	x
7	211080	Ringdichtung 34 x 42 - 7,5 mm	Ring seal 34 x 42 - 7,5 mm	x	x	x	x
8	10013615	Sechskantschraube M4 x 6	hexagon head screw M4 x 6	x	x	x	x
9	10013675	Halter für Hubmagnet	Holder for lift magnet	x	x	x	x
10	10013676	Unterlegscheibe 6,2mm	Washer 6,2mm	x	x	x	x
11	10013836	Steckverbindung für Buchse 2P 1.5Q 250V 10A 5.0C2	Connector for buh 2P 1.5Q 250V 10A 5.0C2	x	x	x	x

Energy module

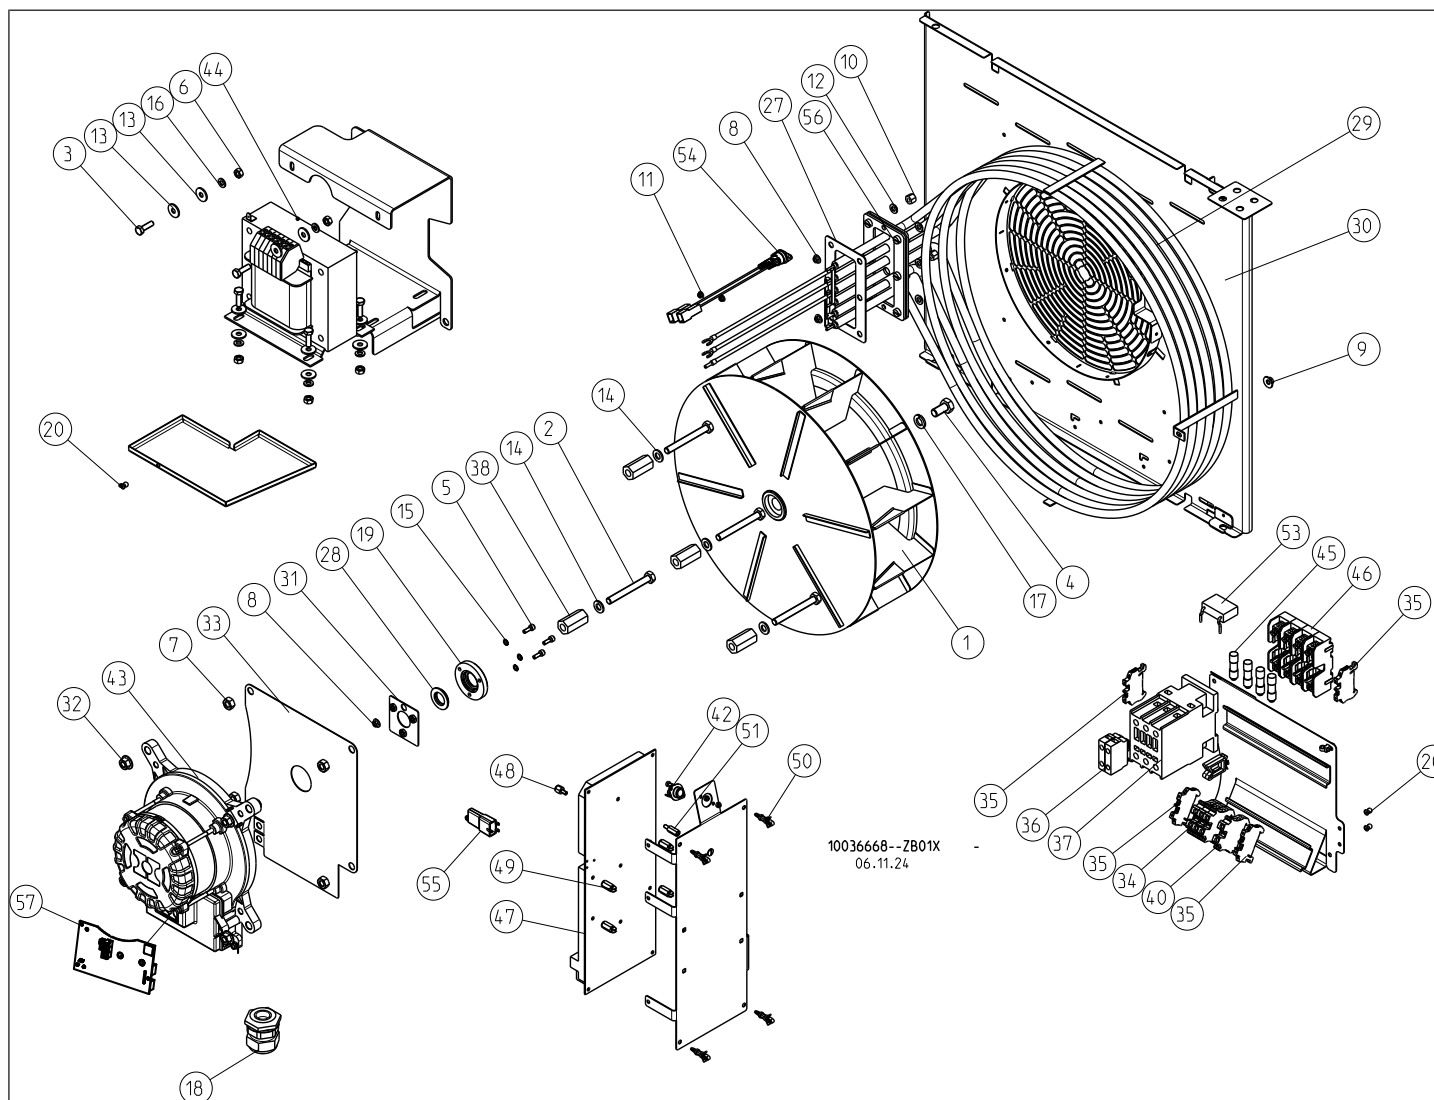



FM09-239A

Position	Art. Nr. Part no.	Deutsch	English	615, 208V (10038651)	621, 208V (10038652)	115, 208V (10038653)	121, 208V (10038654)	615, 480V (10038668)	621, 480V (10038669)	115, 480V (10038670)	121, 480V (10038671)
1	062002	Lüfterrad 350 mm Durchmesser	Fan wheel 350 mm diameter	x	x	x	x	x	x	x	x
2	101198	Sechskantschraube M8 X 70	Hexagon screw M8 X 70	x	x	x	x	x	x	x	x
3	101410	Sechskantschraube M6 x20	Hexagon screw M6 x20	x	x	x	x				
4	101451	Sechskantschraube M10 x 20 mm	Hexagon screw M10 x 20 mm	x	x	x	x	x	x	x	x
5	102006	Innensechskant-Zylinderkopfschraube M4 x	Hexagon socket screw M4 x 12	x	x	x	x				
6	113091	Sechskantmutter M6	Hexagon nut M6					x	x	x	x
7	113092	Sechskantmutter M8	Hexagon nut M8	x	x	x	x	x	x	x	x
8	116044	Sicherungsmutter M4	Lock nut M4	x	x	x	x	x	x	x	x
9	116046	Sicherungsmutter M5	Lock nut M5	x	x	x	x	x	x	x	x
10	116058	Hutmutter M6	Cap nut M6	x	x	x	x	x	x	x	x
11	116060	Sperrzahnmutter M3	self locking nut M3	x	x	x	x	x	x	x	x
12	120027	Unterlegscheibe 6,4 mm	Washer 6,4 mm	x	x	x	x	x	x	x	x
13	120030	Unterlegscheibe 6,4 mm	Washer 6,4 mm					x	x	x	x
14	120109	Unterlegscheibe 8,4 mm	Washer 8,4 mm	x	x	x	x	x	x	x	x
15	121023	Fächerscheibe 4,3 mm	Serrated washer 4,3 mm	x	x	x	x	x	x	x	x
16	121033	Federring, 6 mm	Lock washer, 6 mm					x	x	x	x
17	121035	Federring, 10 mm	Lock washer, 10 mm	x	x	x	x	x	x	x	x
18	202677	Kabelverschraubung M32	Cable screw fitting M32	x	x	x		x	x	x	
18	203750	Kabelverschraubung M50	Cable screw fitting M50				x				x
19	204681	Arretierscheibe für Wellendichtung	Arrest washer for shaft sealing	x	x	x	x	x	x	x	x
20	208006	Blindniete	Rivet	x	x	x	x	x	x	x	x
27	211083	Flachdichtung 70 x 130 - 1 mm für Rohrheizkörper	Flat seal 70 x 130 - 1 mm for heating element	x	x	x	x	x	x	x	x
28	211084	Motorwellendichtung Ringdichtung 17 x 29 - 4,8 mm	Shaft seal for motor	x	x	x	x	x	x	x	x
29	574175	Rohrheizkörper 13,2 kW; 240 V; mit Litze	Heating element 13,2 kW; 240 V; with wires	x							
29	574179	Rohrheizkörper 22,8 kW; 240 V; mit Litze	Heating element 22,8 kW; 240 V; with wires		x						
29	574203	Rohrheizkörper 20,52 kW; 240 V; mit Litze	Heating element 20,52 kW; 240 V; with wires			x					
29	574178	Rohrheizkörper 36 kW; 240 V; mit Litze	Heating element 36 kW; 240 V; with wires				x				
29	574204	Rohrheizkörper 11,78 kW; 480 V; mit Litze	Heating element 11,78 kW; 480 V; with wires					x			
29	574201	Rohrheizkörper 20,4 kW; 480 V; mit Litze	Heating element 20,4 kW; 480 V with wires						x		

Position	Art. Nr. Part no.	Deutsch	English	615, 208V (10036651)	621, 208V (10036652)	115, 208V (10036653)	121, 208V (10036654)	615, 480V (10036668)	621, 480V (10036669)	115, 480V (10036670)	121, 480V (10036671)
29	574202	Rohrheizkörper 18,36 kW; 480 V; mit Litze	Heating element 18,36 kW; 480 V; with wires						x		
29	574205	Rohrheizkörper 32,1 kW; 480 V; mit Litze	Heating element 32,1 kW; 480 V; with wires								x
30	890206	Luftleitblech für Kombidämpfer 615	Air baffle for Combisteamer 615	x				x			
30	890211	Luftleitblech für Kombidämpfer 621	Air baffle for Combisteamer 621		x				x		
30	890216	Luftleitblech für Kombidämpfer 10.1 Elektro	Air baffle for Combisteamer 10.1 Electric			x				x	
30	890221	Luftleitblech für Kombidämpfer 10.2 Elektro	Air baffle for Combisteamer 10.2 Electric				x				x
31	945661	Arretierscheibe für Motorwelle	Arrest washer for motor shaft	x	x	x	x	x	x	x	x
32	10012867	Sper Zahn Mutter M8	Locking nut	x	x	x	x	x	x	x	x
33	10013363	Motorabdeckblech	Motor cover	x	x	x	x	x	x	x	x
34	10013624	Reihen клемме UT 35	Terminal Block UT 35	x	x	x	x				
34	10013631	Reihen клемме 16 mm ² ; grau	Terminal block 16 mm ² ; grey					x	x	x	x
35	10013632	Reihenend клемме	Terminal end block	x	x	x	x	x	x	x	x
36	10013669	Schutz-Hilfskontakt 10 A	Auxiliary contact 10 A					x	x	x	x
37	10011579	Schutz 80 A, 230 V	Contacto 80 A, 230 V	x	x	x					
37	10014026	Schutz 130 A, 230 V	Contacto 130 A, 230 V				x				
37	10013670	Schutz 56 A, 230 V	Contacto 56 A, 230 V					x	x	x	x
38	10013728	Sechskantmutter M8 Hoch 35 SW 17	Hexagon nut 35 SW 17	x	x	x	x	x	x	x	x
42	10014580	Thermoschalter 70 °C aus	Thermoswitch 70 °C off	x	x	x	x	x	x	x	x
43	10014663	Motor FlexiCombi 6.x - 20.x	Motor FlexiCombi 6.x - 20.x	x	x	x	x	x	x	x	x
44	10015147	Steuertrafo 750 VA	Transformer 750 VA					x	x	x	x
45	202644	Sicherung 6 A; 22 x 58 mm (1.31X0.41")	Fuse 6 A; 22 x 58 mm (1.31X0.41")	x	x	x					
45	10016452	Sicherung 6.25 A Träge; 1,5 x 0,41"; 600 V	Fuse 6.25 A; 1,5 x 0,41"; 600 V				x	x	x	x	x
46	202636	Sicherungshalter 22 x 58 mm (1.31X0.41");	Fuse holder 22 x 58 mm (1.31X0.41"); two-	x	x	x					
46	10016454	Sicherungshalter für Sicherung 1,5 x 0,41"	fuse holder for fuse 1,5 x 0,41"				x	x	x	x	x
47	10019108	Steuerplatine A1 Kombidämpfer, G2	Control pcb A1 Combisteamer, G2	x	x	x	x	x	x	x	x
48	10023084	Abstandsbolzen	Spacer	x	x	x	x	x	x	x	x
49	10026428	Abstandsbolzen M4	Spacer M4	x	x	x	x	x	x	x	x
50	10026429	Abstandshalter	Distance holder	x	x	x	x	x	x	x	x
51	10026430	Abstandsbolzen M4	Spacer M4	x	x	x	x	x	x	x	x
53	10011580	RC-Kombination 220NF 220Ohm 110V-	RC-combination 220NF 220Ohm 110V-	x	x	x	x				
53	10030469	RC-Kombination 110 - 240 V	RC-combination 110 - 240 V					x	x	x	x
54	10031056	Sicherheitstemperaturbegrenzer 330 °C	Safety limit switch 330 °C	x	x	x	x	x	x	x	x
55	10035058	Konfigurationsspeicher A4, 64 kbit	Configuration key A4, 64 kbit	x	x	x	x	x	x	x	x
56	10026008	RHK Flansch 6 Bolzen	Bracket, 6 bolts	x	x	x		x	x		
56	10026009	RHK Flansch 3 Bolzen	Bracket, 3 bolts				x			x	x
57	10037813	Steuerplatine für Motor 10014663	Fan motor pcb for motor 10014663	x	x	x	x	x	x	x	x

Additional circuit board A3

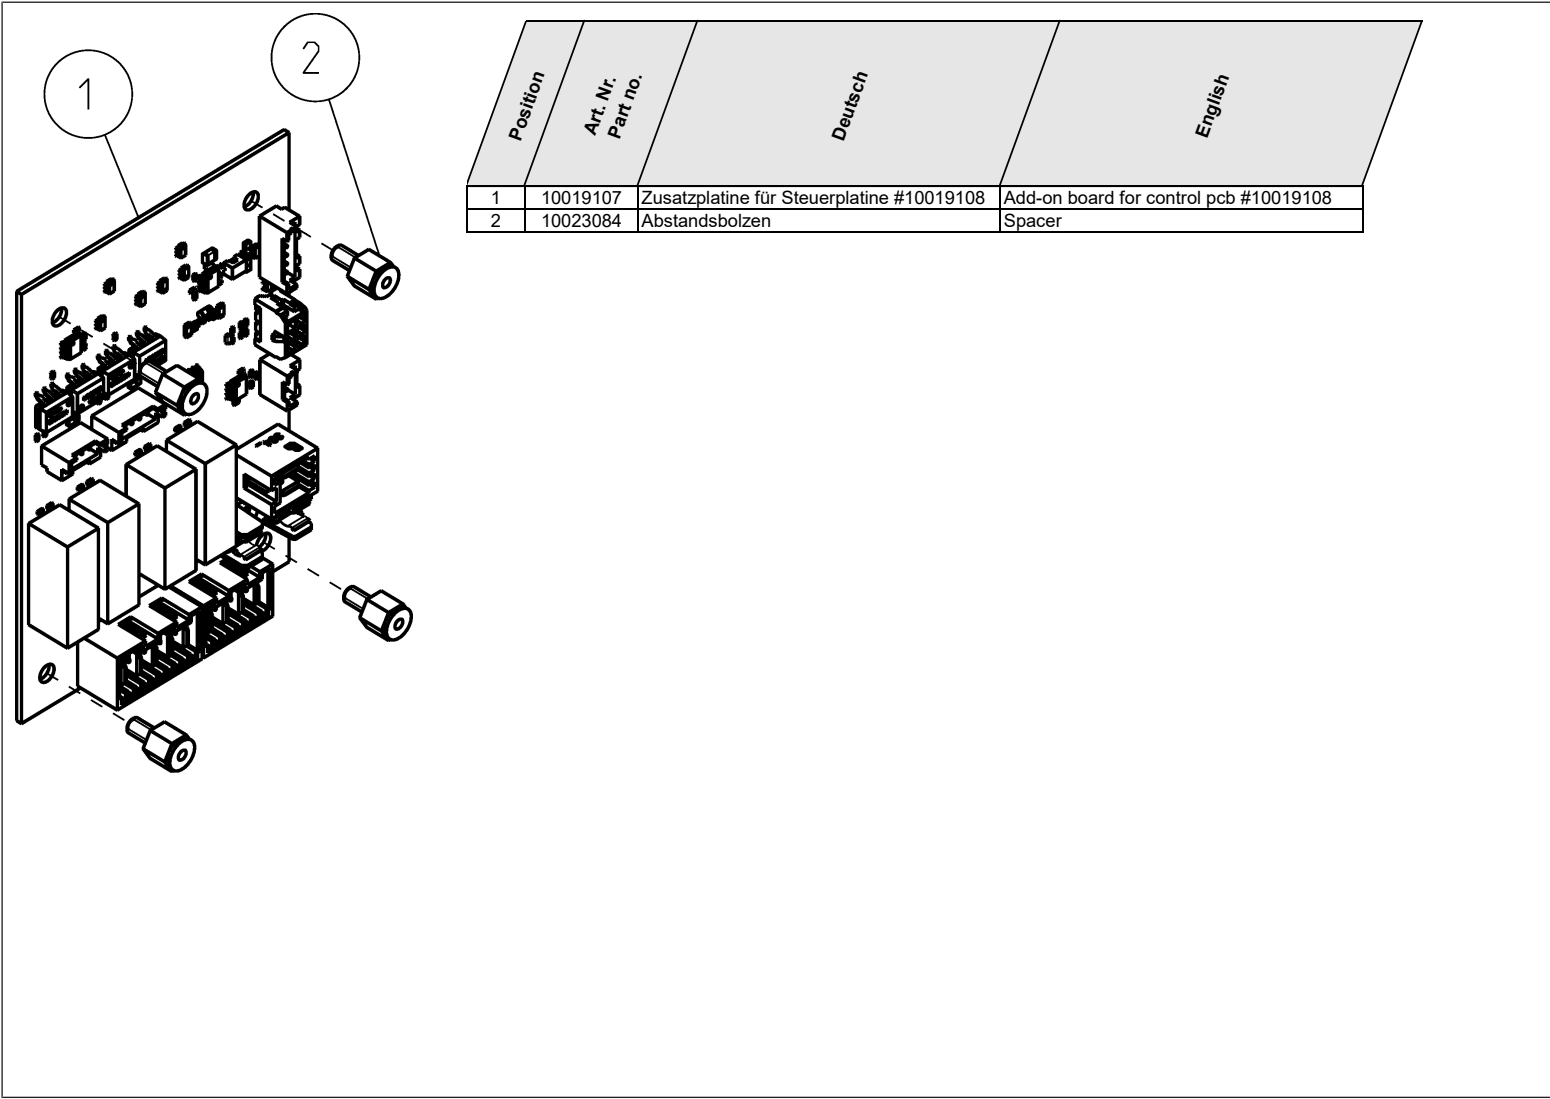




Hose reel box with electrical parts

Position	Art. Nr. Part no.	Deutsch	English	615, 621, 115 UL 208V 121 UL 480V (10028 105)	121 UL 208V (10036 246)	615, 621, 115 UL 480V (10036 245)
1	10014664	Leistungsnetzteil für Motor	Power supply for motor	x	x	x
2	10017528	Schlauchaufroller (komplett mit Schlauch, ohne Handbrause)	Tube carrier (incl.hose, without hand shower)	x	x	x
3	10017529	Schlauchaufrollkasten	hose carrier box	x	x	x
4	10018991	Netzteil 85-264V AC, 100W, 24V DC	Power supply 85-264V AC, 100W, 24V DC	x	x	x
5	10019505	Handbrause (ohne Schlauch)	Hand shower (without hose)	x	x	x
6	101127	Sechskantschraube M4 x 8	Hexagon screw M4 x 8	x	x	x
7	102013	Innensechskantschraube M4 x 110	Hexagon socket screw M4 x 110	x	x	x
8	105001	Linsenkopfschraube TORX M4 x 8 + Federring	Countersunk head screw TORX M4 x 8 + spring washer	x	x	x
9	120017	Unterlegscheibe 4,3 mm	Washer 4,3 mm	x	x	x
10	121023	Fächerscheibe 4,3 mm	Serrated washer 4,3 mm	x	x	x
11	202709	Winkelflachstecker; 6,3 mm	Elbow plug; 6,3 mm	x	x	x
12	203352	Schnappdurchführung LD 50 mm	Snap through-bearing LD 50 mm	x	x	x
13	203506	Isoliertülle für 6,3 mm Flachstecker	insulating for 6,3 mm tab (flat plug)	x	x	x
14	203819	Lüfter 21 W; 230 V; 120 x 120 mm	Cooling fan 21 W; 230 V; 120 x 120 mm	x	x	x
15	204607	Haltebügel für Ventilator	holding bow for fan	x	x	x
16	10013390	Kühlkörper	Heat sink	x	x	x
17	10017617	Schlauchverschraubung (Winkel) R1/4" A - 10/7	Screwing hose elbow R1/4" A - 10/7	x	x	x
18	10033028	Halbleiterrelais 95A	Solid state relay (SSR) 95A	x		
18	10033029	Halbleiterrelais 125A, Typ Celduc	Solid state relay (SSR) 125A, type Celduc		x	
18	10033027	Dual Halbleiterrelais 50A, Typ Celduc	Dual Solid state relay (SSR) 50A, type Celduc			x
18	10033029	Halbleiterrelais 125A, Typ Celduc	Solid state relay (SSR) 125A, type Celduc		x	
19	203089	Flachsteckhülse 6,3 mm; 1,5 - 2,5 mm²	Panel socket 6,3 mm; 1,5 - 2,5 mm²	x	x	x
20	10031470	Halter für Netzteil	Power supply support	x	x	x
21	10031624	Schraube M3	Screw M3	x	x	x
22	10011599	Halter für Magnetventil	Holder for solenoid valve	x	x	x
23	10017616	Schlauchverschraubung G1/2" I - 10/7	Screwing hose G1/2" I - 10/7	x	x	x
24	10017618	Kunststoffschlauch 7mm X 1.5mm	PVC Hose 7mm X 1.5mm	x	x	x
25	10017619	Sicherungsring für Schlauch	Snap ring for hose	x	x	x
26	10034591	Verteilerstück 2 x 3/4"; 1/2"	Distributor 2 x 3/4"; 1/2"	x	x	x
27	101120	Sechskantschraube M4 x 16	Hexagon screw M4 x 16	x	x	x
28	121023	Fächerscheibe 4,3 mm	Serrated washer 4,3 mm	x	x	x
29	911659	Halteplatte für Magnetventil	Bracket for solenoid valve	x	x	x

Water assembly with WaveClean

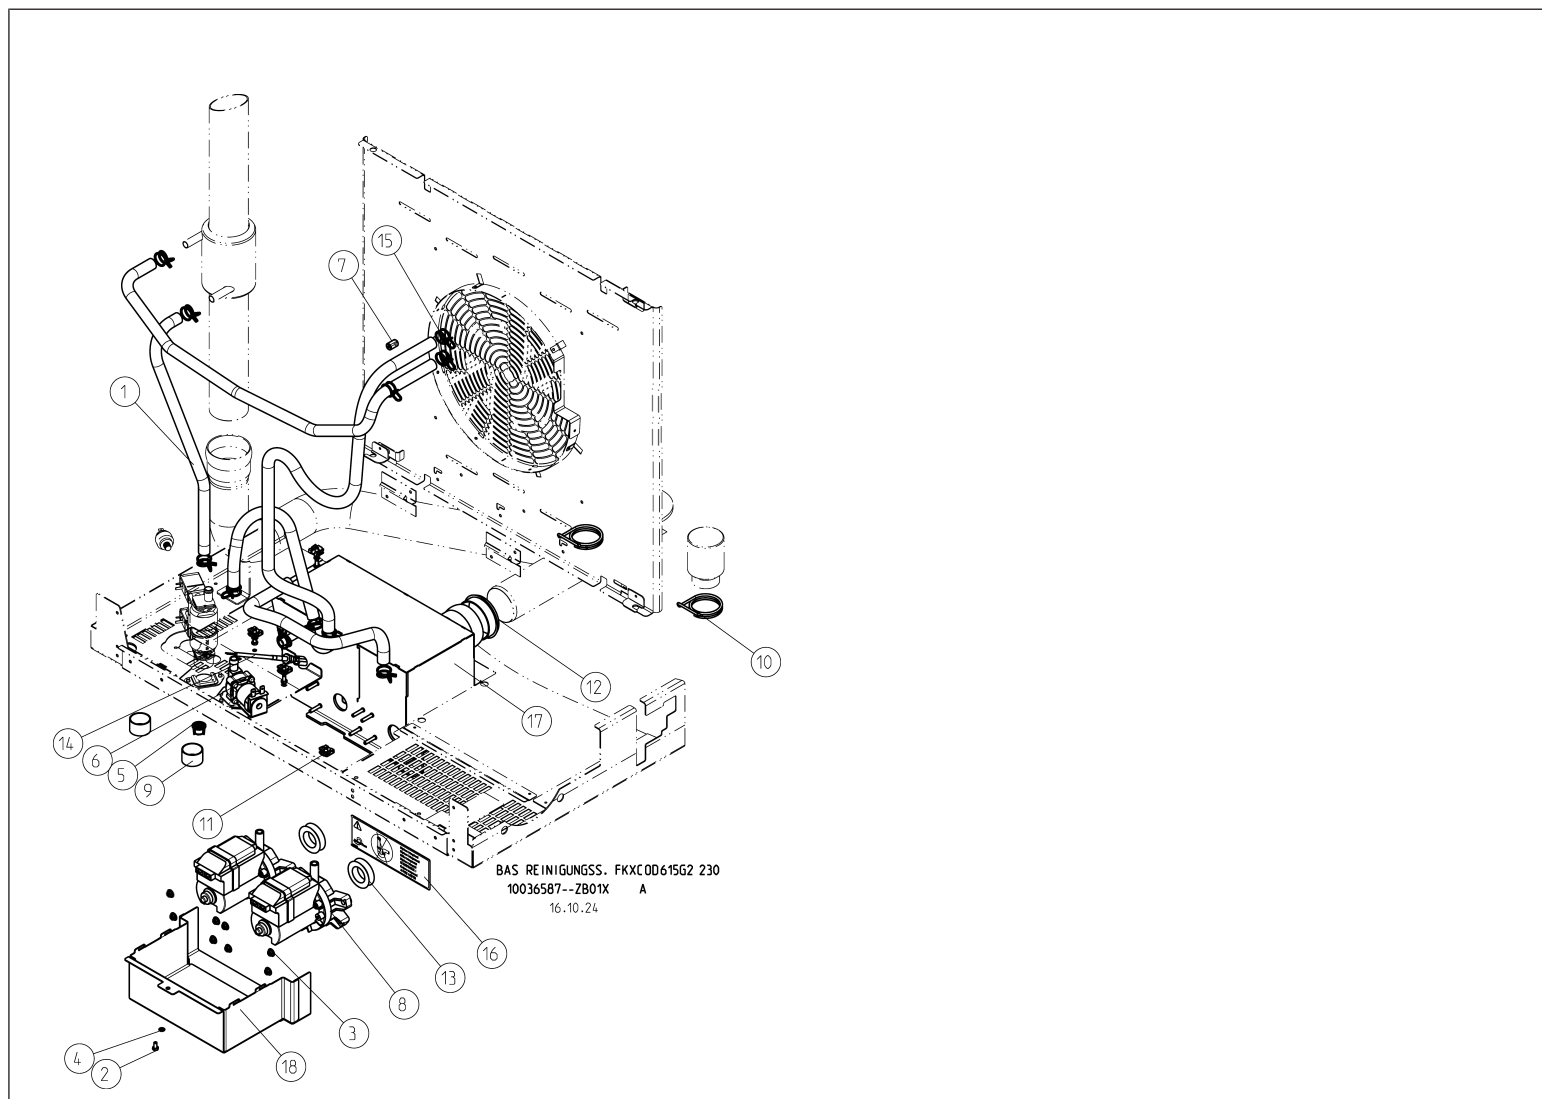


FM09-239A

Water assembly with WaveClean


Position	Art. Nr. Part no.	Deutsch	English	208-400 V / 60 Hz (10038590)
1	050017	Silikonschlauch 9 x 3,2 mm (Meterware)	Silicon hose 9 x 3,2 mm (meter ware)	x
2	101127	Sechskantschraube M4 x 8	Hexagon screw M4 x 8	x
3	116044	Sicherungsmutter M4	Lock nut M4	x
4	121023	Fächerscheibe 4,3 mm	Serrated washer 4,3 mm	x
5	201134	Sieb; 19,5 Durchmesser (Kunststoff)	Sieve (water inlet filter); 19,5 mm diameter	x
6	201192	Magnetventil 3/4"; 230 V	Solenoid valve 3/4"; 230 V	x
7	203820	Abstandsrolle 9,5 x 2,5 - 15 mm	Distance bush 9,5 x 2,5 - 15 mm	x
8	203826	Pumpe 35 l/min; 208 - 240 V; 60 Hz	Pump 35 l/min; 208 - 240 V; 60 Hz	x
9	203975	Abdeckkappe D 26.2 - 18.5	cap D 26.2 - 18.5	x
10	204429	Kartuschenhalter für Luftleitblech	Cartridge holder for air baffle	x
11	208025	Schnappmutter M4	Snap nut M4	x
12	211079	Ringdichtung für Rohr DN 50	Ring seal for DN 50 pipe	x
13	211131	Flachringdichtung 24 x 34 -10 mm	Flat ring seal 24 x 34 -10 mm	x
14	10038174	Temperaturfühler Kombidämpfer 6.x, 10.x G2 (Wrasen)	Temperature probe Combisteamer 6.x, 10.x G2 (drain probe)	x
15	10014176	Spannschlauchschele Y 15.9-16.8	assembling faceplate Y 15.9-16.8	x
16	10017976	Aufkleber "Siphon integriert"	Sticker "siphon integrated"	x
17	10020037	Siphon für Kombidämpfer Tischgerät mit WaveClean	Siphon for table top unit with WaveClean	x
18	10020766	Abdeckung	Cover	x

DynaSteam humidification

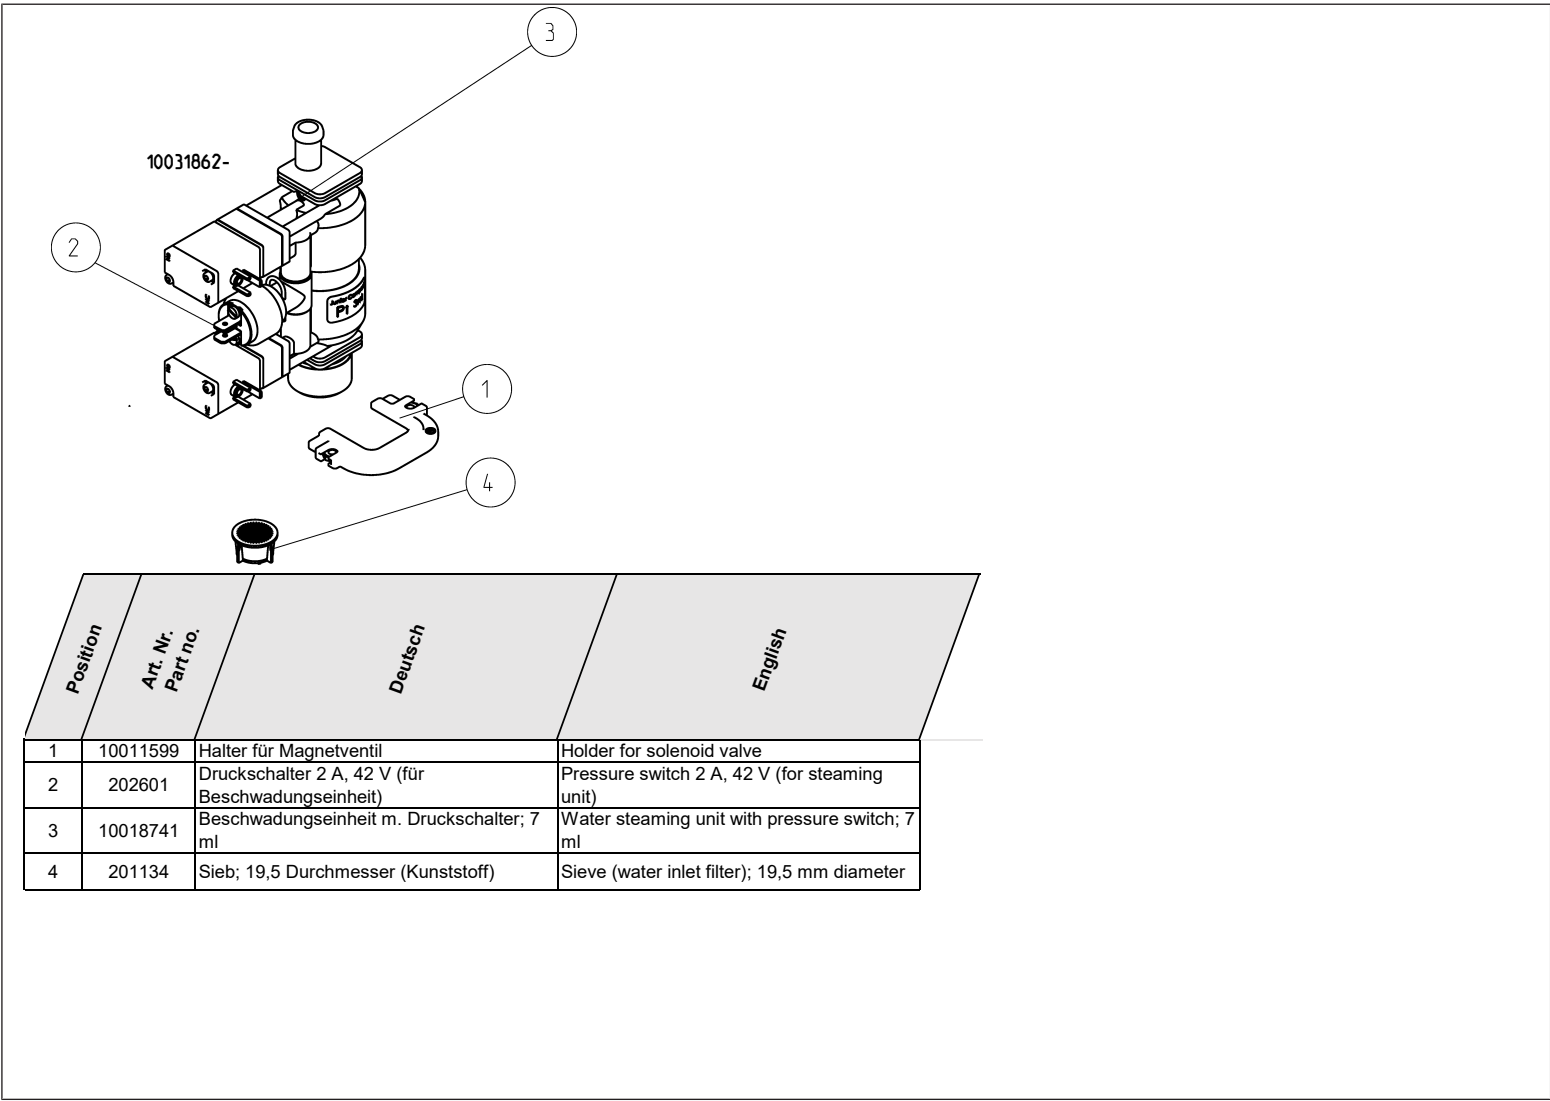

FM09-239A

Drainage area of the cooking chamber

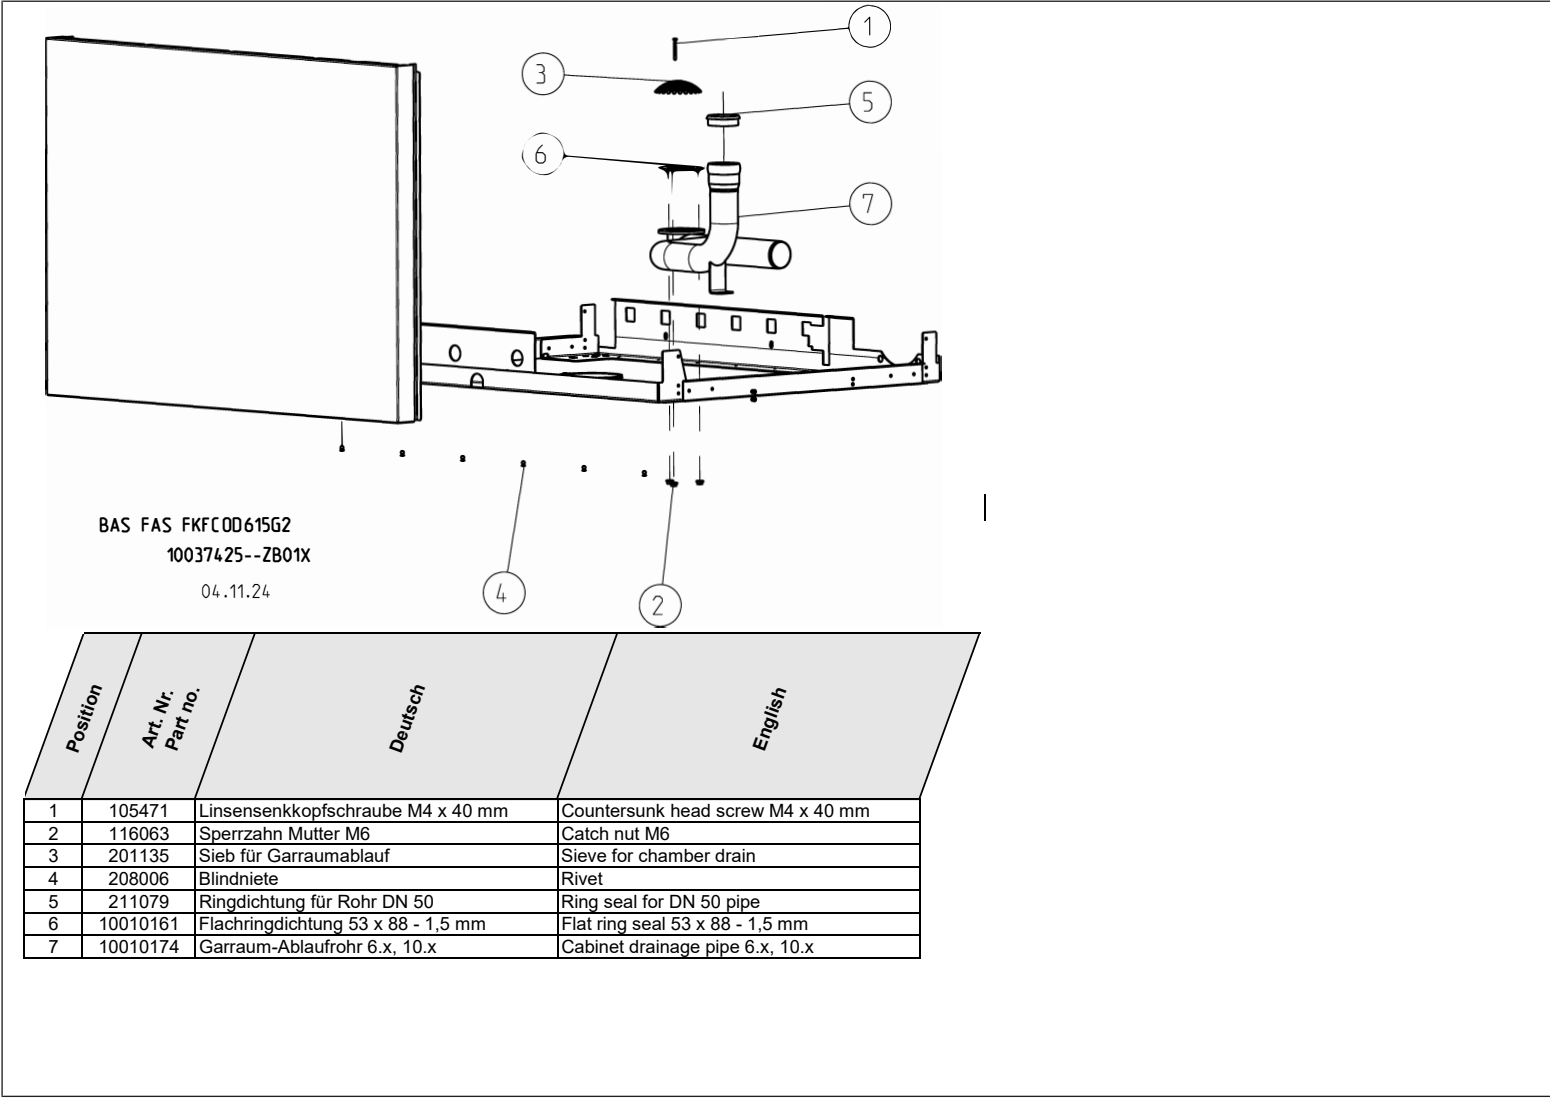

Wires and cable harnesses

... from	... to	Description	Item number
Control board A1	Motor M10	CAN bus control cable, 72 cm long	10035216
Power supply unit T10	Motor M10	Wiring harness; power supply unit - motor, 250mm long	10013811
Control board A1	Operation panel A2, with touch	Wiring harness touch operation panel A2 - Control board A1 (incl. CAN)	10035205
Control board A1, bottom	Operation panel A2, with touch	Wiring harness touch operation panel A2 - Control board A1 bottom (incl. CAN)	10035207
Control board A1, X6	Lift magnet M8	Wiring harness control board A1 - Lift magnet M8	10023356
Control board A1, X4	Magnetic valve for water vapor elimination K12	Wiring harness control board A1 - solenoid valve K12, 67 cm long	10035210
Control board A1, X23	WaveClean pumps G16, G24	Wiring harness control board A1 - cleaning pumps, 74 cm long	10035208
Control board A1, X10	Steaming appliance with pressure switch	Wiring harness; control board A1 - steam supply unit, 1.55 m long	10035238
Operation panel A2	WLAN module	Micro USB cable operation panel A2 - WLAN module, 1 m long	10037632
Operation panel A2	WLAN module	24V supply cable operation panel A2 - WLAN module, 1.1 m long	10037644
Control board A1	WLAN module	24V extension cable, 1.1 m long	10037632
Additional circuit board A3, X66 and X67	Grease pump G40, solenoid valve K41	Wiring harness grease collection system	10035227



Henny Penny Corp., Eaton, Ohio 45320, Revised 3/30/2025



Henny Penny Corporation
P.O.Box 60
Eaton, OH 45320
USA

Phone +1 937 456-8400
Fax +1 937 456-8402

Toll free in USA
Phone +1 937 417-8417
Fax +1 937 417-8434

www.hennypenny.com